
## 展項目的位置圖 Location Plan of the Development



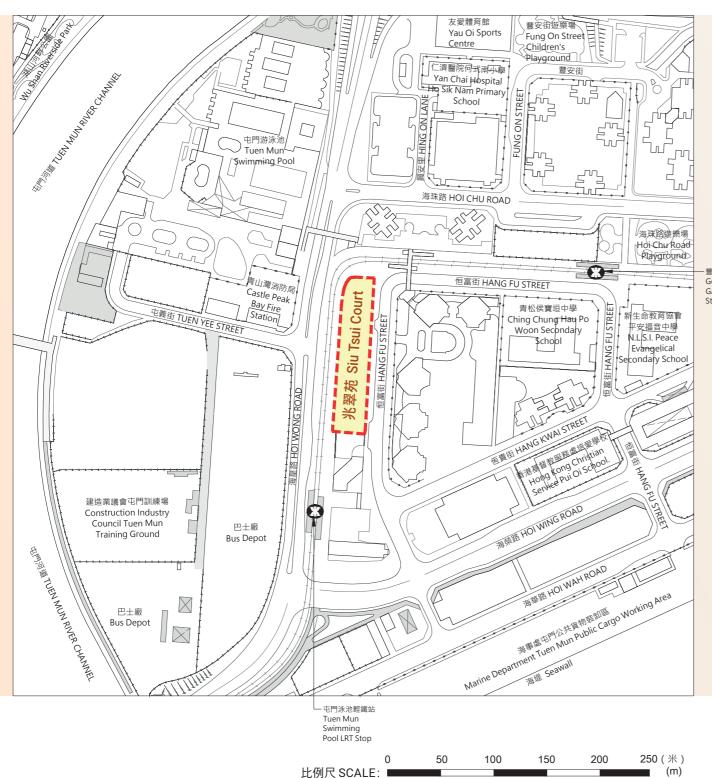

- 豐景園輕鐵站 Goodview Garden LRT

此位置圖是參考地政總署測繪處於2024年7月18日出版之數碼地形圖(編號分別為T5-SE-B、T5-SE-D及T6-SW-A)及於2024年8月4日出版之數碼地形圖(編號為T6-SW-C)製作,有需要處經修正處理。

地圖由空間數據共享平台入門網站提供,香港特別行政區政府為知識產權擁有人。


The Location Plan is prepared with reference to the Digital Topographic Map Nos. T5-SE-B, T5-SE-D and T6-SW-A all dated 18 July 2024 and the Digital Topographic Map No. T6-SW-C dated 4 August 2024 from Survey and Mapping Office of the Lands Department, with adjustments where necessary.

The map is provided by the Common Spatial Data Infrastructure Portal and intellectual property rights are owned by the Government of the HKSAR.

註: 賣方建議買方到該發展項目作實地考察,以對該發展項目、其周邊地區環境及附近的公共設施有較佳的了解。

Note: The Vendor advises purchasers to conduct on-site visit for a better understanding of the Development, its surrounding environment and the public facilities nearby.



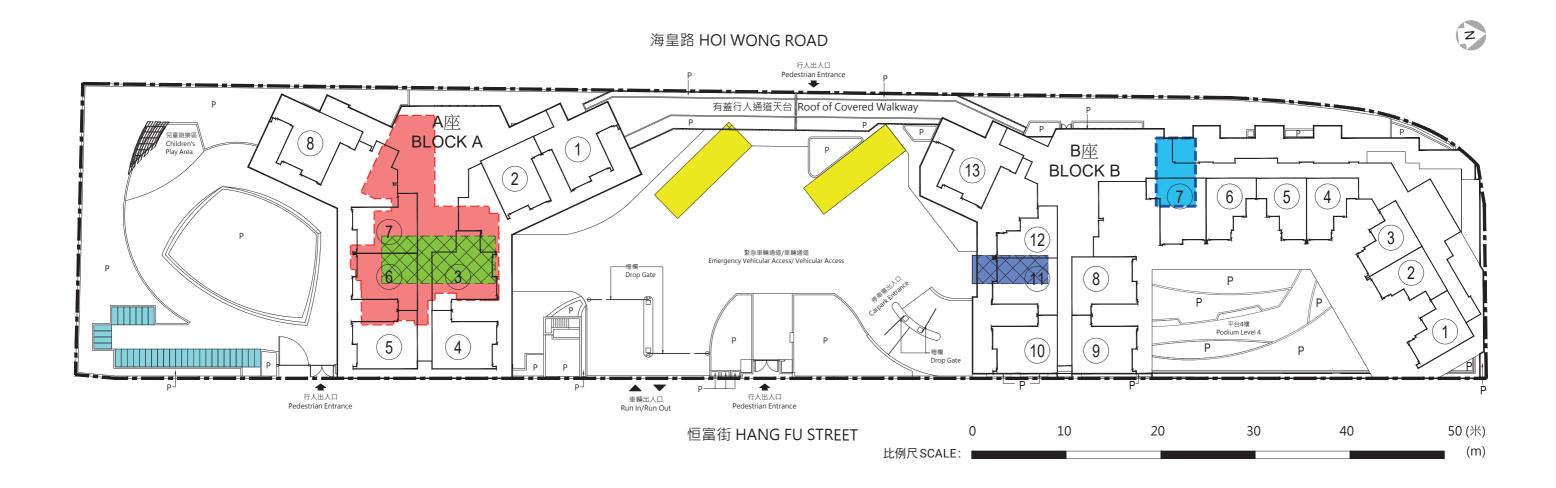

## 圖例 NOTATION





## 座標準樓層平面圖(2樓至29樓)

Block A Typical Floor Plan (2/F-29/F) 鐵欄冊及鋁裝飾鰭設於2樓至13樓 鐵欄柵及鋁裝飾鰭設於2樓至13樓 METAL GRILLE WITH ALUMINUM METAL GRILLE WITH ALUMINUM ARCHITECTURAL FIN AT 2/F TO 13/F ARCHITECTURAL FIN AT 2/F TO 13/F 物料回收室 RS & MRR 2樓至13樓部分平面圖 PART PLAN FOR 2/F TO 13/F 建築裝飾 ARCHITECTURAL FEATURE 垃圾及 物料回收室 隔聲鰭 RS & MRR ACOUSTIC FIN 升降機大堂 LIFT LOBBY 裝飾鳍-ARCHITECTURAL FINS 減壓掣 PRESSURE REDUCING v 6樓及15樓部分平面圖 PART PLAN FOR 6/F AND 15/F 裝飾鰭-ARCHITECTURAL FINS 1. 平面圖所列之數字為以毫米標示之建築結構尺寸。 2. 每個住宅物業的層與層之間的高度為2.750米(29樓除外)。 29樓每個住宅物業的層與層之間的高度為2.790米。 3. 每個住宅物業的樓板(不包括灰泥)的厚度為160毫米及215毫米(29樓除外)。 客/飯廳 29樓單位每個住宅物業的樓板(不包括灰泥)的厚度為200毫米。 4. 大廈設有3部升降機。每個住宅樓層均有3部升降機到達。 比例尺 SCALE: \_\_\_ 5. 為減低下落物體從窗戶落入輕鐵的影響,部分單位設有固定窗。 6. 此標準樓層平面圖是根據每座揀選一張可顯示每層最多住宅單位的圖則而選 LIV/DIN 定。其他位於其餘樓層的住宅單位平面圖,請參閱將在選購單位日期前提供的

> 客/飯廳 LIV/DIN

LIV/DIN

6樓及15樓部分平面圖 PART PLAN FOR 6/F AND 15/F

減壓掣 PRESSURE REDUCING VALVE

售樓説明書。 Notes:

註:

- 1. The dimensions on the floor plan are all structural dimensions in millimetre.
- 2. The floor-to-floor height of each residential property is 2.750m (except 29/F). The floor-to-floor height of each residential property on 29/F is 2.790m.
- 3. The thicknesses of the floor slabs (excluding plaster) of each residential property are 160mm and 215mm (except 29/F).
  - The thickness of the floor slabs (excluding plaster) of each residential property on 29/F is 200mm.
- 4. There are 3 lifts in the building. Each residential floor is served by 3 lifts.
- 5. In order to mitigate the impact of falling object from windows to Light Rail Transit, fixed window is provided for some flats.
- 6. This Typical Floor Plan is selected on the basis of selecting one floor plan per block which shows the most number of residential flats per floor. For floor plans of other residential flats on the remaining floors, please refer to the sales brochure which will be available before the date of flat selection.

## 圖例 NOTATION

BATH	浴室	Bathroom
KIT	廚房	Kitchen
HR	消防喉轆	Hose Reel
LIV/DIN	客/飯廳	Living/Dining Room
P.D.	管道槽	Pipe Duct
RS & MRR	垃圾及物料回收室	Refuse Storage and Material Recovery Room
W.M.C.	水錶櫃	Water Meter Cupboard
TELECOM AND ELV ROOM	電訊及特低壓機房	Telecommunications and Extra Low Voltage Room
ELEC. METER ROOM	電錶房	Electrical Meter Room
	固定窗	Fixed Window

5 (米)





Z

ACOUSTIC FIN

